

## Fume Filtration Units

### Key Features

- Type: Electric
- Air re-circulation
- Three part filtration system
- Illumination
- Overheat/fire protection
- Suitable for use over electric units only up to 9kW



13

### Construction

- Body: stainless steel grade 430
- Filters: Aluminium mesh and carbon

### Available Options


- Choice of widths

### Available Accessories

- N/A

## Specifications

| Model                                                         | L3    | L4    |
|---------------------------------------------------------------|-------|-------|
| External height (mm)                                          | 545   | 545   |
| External width (mm)                                           | 915   | 1295  |
| External depth (mm)                                           | 610   | 610   |
| Net weight unpacked (kg)                                      | 25    | 44    |
| Volume of air filtered per hour (m <sup>3</sup> )             | 460   | 690   |
| Gross weight packed (kg)                                      | 31    | 50    |
| Shipping volume (m <sup>3</sup> )                             | 0.497 | 0.657 |
| Total electrical power rating (kW)                            | 0.35  | 0.45  |
| Electrical supply 1N~+E<br>230V 50-60Hz<br>Current Rating (A) | 1.5   | 2.0   |

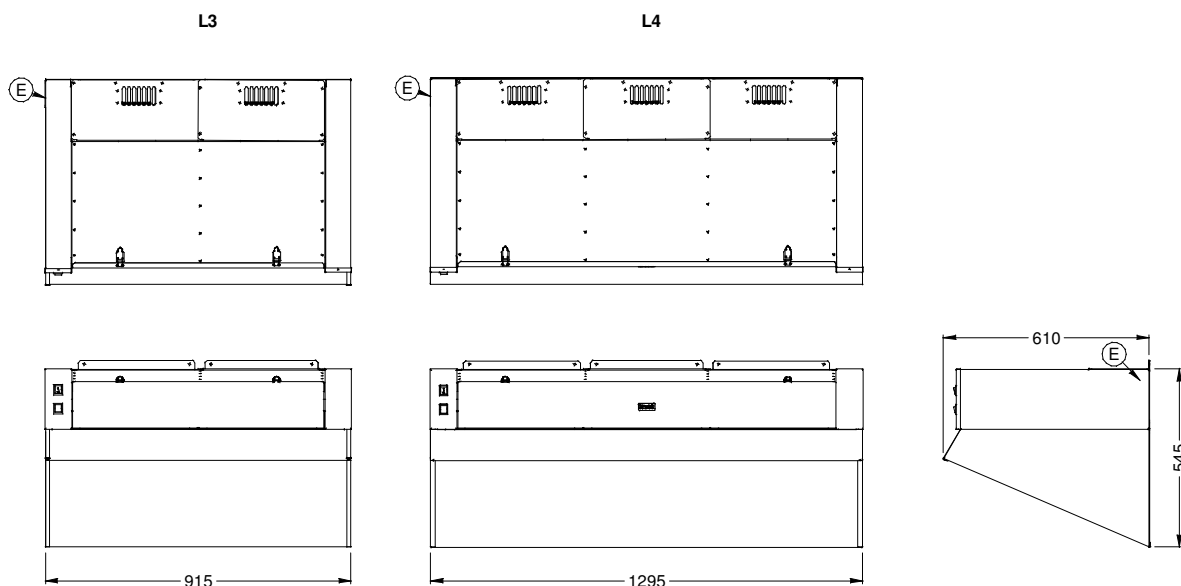

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
Website: [www.lincat.co.uk](http://www.lincat.co.uk) UK Sales e-mail: [sales@lincat.co.uk](mailto:sales@lincat.co.uk) International Sales e-mail: [export@lincat.co.uk](mailto:export@lincat.co.uk)



Document ref:  
FUMEFILTRATION  
Issue date: Oct-09