MP 450 V.V. Ultra
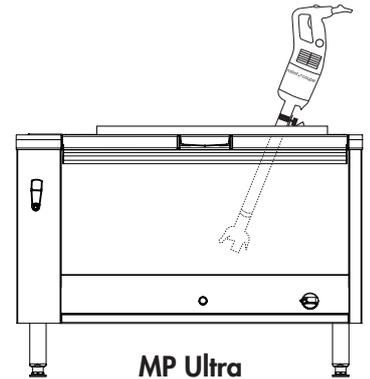
Easy Plug

D	
Pan capacity	up to 100 litres

▶ Specially designed for intensive use in commercial/institutional catering

MP Ultra

A SALES DESCRIPTION

Ideal for blending soups and puréeing fruit and vegetables. Special institutional catering model intended for intensive use

B TECHNICAL DESCRIPTION

MP 450 V.V. Ultra Power Mixer. 230V/50Hz/1ph. Power: 500 W. Variable speed: 1,500 - 9,000 rpm. 100% stainless-steel blades, bell and tube (total length: 450 mm). "Easy Plug" system featuring detachable power cord

C TECHNICAL CHARACTERISTICS

Effective output	500 W
Electrical data	230V/50Hz/1ph 2.1 A – plug supplied
Variable speed	1,500 - 9,000 rpm
Recyclability	95%
Net weight	5 kg
Reference	34850

E CHARACTERISTICS AND BENEFITS

MOTOR UNIT

- Power 500 W
- Stainless-steel motor unit with air vents in the top section only to ensure watertightness
- Lug on motor housing serves as a rest and pivot on the pan rim for greater user comfort
- Variable speed: 1,500 - 9,000 rpm
- Self-regulating speed system
- New patented "Easy Plug" system making it easier to replace the power cord during after-sales servicing
- Cord winding system for tidy storage and optimum lifespan

TUBE AND BELL

- 100% stainless-steel blades, bell and tube (total length: 450 mm).
- Foot with detachable bell and blades (patented system exclusive to Robot-Coupe)
- Watertight bell design for optimum lifespan

STANDARD ATTACHMENTS

- Wall-mounted stick blender holder
- Tool for fixing and detaching the blades

STANDARDS
EN 12100-1 & 2-2004, EN 60204-1-2006, EN 12853, EN 60529-2000 : IP55 & IP34

ETL LISTED 9900098
Conforms to
UL   NSF/ANSI
Std 763   Std 8
Certified to
CAN/CSA
Std C22.2 No.195

F **OPTIONAL ATTACHMENTS**

- 3 adjustable stainless-steel pan supports:
  - Ref. 27363 – for pans with a diameter of 330 650 mm
  - Ref. 27364 – for pans with a diameter of 500 1000 mm
  - Ref. 27365 – for pans with a diameter of 850 1300 mm

- 1 universal pan support:
  - Ref. 27354 – screws onto pan rim

G **DRAWINGS & DIMENSIONS**

230 V / 50 Hz / 1 ph – power cord and plug supplied

177   125   841   230   230