

## Silverlink 600 Doughnut Fryer

### Key Features

- Type: Gas
- Counter top unit
- Thermostatic temperature control 110°C to 190°C
- Flame failure device
- Top temperature cut-out
- Cool zone
- Piezo ignition
- Supplied with drain plate, two frying trays and lid
- Nitrile rubber feet
- Millivolt control system (no electrical connection required)
- Finned heat exchange system



DC04

### Construction

- Body: stainless steel grade 430
- Frying trays: copper flash and bright tin plated

### Available Options




- Natural Gas
- Propane Gas

### Available Accessories

- DCD01 Doughnut dispenser
- Various pedestals and stands

## Specifications

Model	
External height (mm)	425
External width (mm)	450
External depth (mm)	653
Oil capacity (litres)	8.5
Net weight unpacked (kg)	26
Gross weight packed (kg)	31
Shipping volume (m <sup>3</sup> )	0.214
Heat input per burner Natural (kW)	11.3
Heat input per burner Propane (kW)	11.3
Total heat input Natural (kW)	11.3
Total heat input Propane (kW)	11.3
Gas consumption at full rate Natural (m <sup>3</sup> h <sup>-1</sup> )	1.08
Gas consumption at full rate Propane (kg h <sup>-1</sup> )	0.81
Gas inlet	G ½ male
Btu/h conversion	kW x 3412

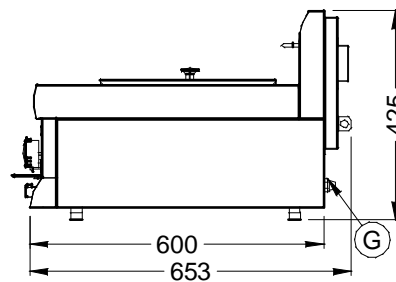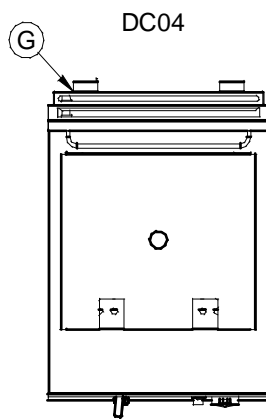

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
Website: [www.lincat.co.uk](http://www.lincat.co.uk) UK Sales e-mail: [sales@lincat.co.uk](mailto:sales@lincat.co.uk) International Sales e-mail: [export@lincat.co.uk](mailto:export@lincat.co.uk)



Document ref: xxxxx  
Issue date: Jan-09