



## P6B3 - Panther 670 Series Free-standing Hot Cupboard - Bain Marie Top - 3GN - W 1205 mm - 2.8 kW

A great solution for holding and transporting food at the perfect temperature, the Panther 670 Series Hot Cupboard / Bain Marie is designed to fit through narrow doorways, so is ideal for pubs and smaller restaurants as well as nursing and care homes where plated meals are to be transported from the kitchen to the residents.

- ✓ Ideal to fit through narrow corridors and doorways
- ✓ Bain marie top, ideal for small restaurants, cafes and pubs, as well as nursing and care homes, where the easy transportation of plated meals to diners and residents is a necessity
- ✓ Fan assisted hot cupboard provides even heat distribution, fast heat up and recovery times, and lower energy usage. Four shelf positions allow adjustment to meet individual needs.
- ✓ Fully 1/1 GN compatible hot cupboard for operational efficiency. Units available to take 3 x 1/1 GN containers up to 150mm deep.
- ✓ Thermostatically controlled bain marie top can be operated with wet or dry heat. Accurate digital electronic control of the hot cupboard temperature, adjustable between 20 and 99 degrees C, ensures compliance with food hygiene regulations
- ✓ Double skinned construction provides efficient heat retention and a cool to touch exterior - safe and energy efficient. Removable doors and shelves allow access to the fully stainless steel interior for easy cleaning
- ✓ Supplied with two heavy duty multi-section chrome plated rod shelves capable of taking the heaviest loads
- ✓ Drain tap located inside the hot cupboard allows fast and easy draining

### Specifications

Summary		Power and Performance	
Range Name	Panther	Gastronorm Capacity	3 x GN1/1
Power Type	Electric	Total Power kW	2.8
Unit Type	Free-standing	Temperature Range °C	20 - 99
Available in UK Only	No	IP Rating	IP24
UK Warranty	2 Years Parts and Labour Warranty	Plate Capacity	302
Export Warranty	Contact your local dealer	Temperature Control	Top: Mechanical/Bottom: Electronic
GTIN Code	5056105103400		




Key Specifications		Weights and Dimensions	
Drain Location	Right side interior mounted	Unit Height (External) mm	912
Number of Shelves included	2	Unit Width (External) mm	1205
Number of Shelf Positions	4	Unit Depth (External) mm	672
Pot Type	Gastronorm	Height (Internal) mm	432
Type of Heat	Wet/Dry	Width (Internal) mm	1020
Heated Base	Yes	Depth (Internal) mm	512
Heated Gantry	No	Shelf Dimensions Width mm	966
Static or Mobile	Mobile	Shelf Dimensions Depth mm	512
		Net Weight Kg	95.6

Supply Connections		Shipping	
Requires Installation	No	Packed Weight Kg	111.4
Requires Electrical Supply	Yes	Packed Height cm	103
UK 3 Pin Plug	Yes	Packed Width cm	120
Requires Hardwiring	No	Packed Depth cm	80
Electrical Supply Rating Watts	2,850		
Single Phase Amps	12.4		
Single Phase Voltage	230		

Available Options	
<b>Overshelf or Gantry</b>	
PG3A	PG3A - Ambient Gantry
PG3H	PG3H - Heated Gantry
PS3A1	PS3A1 - 1 Ambient Overshelf
PS3A2	PS3A2 - 2 Ambient Overshelves
PS3A3	PS3A3 - 3 Ambient Overshelves
PS3H1	PS3H1 - 1 Heated Overshelf
PS3H2	PS3H2 - 2 Heated Overshelves
PS3H3	PS3H3 - 3 Heated Overshelves
<b>Door Locks</b>	
PDL3	PDL3 - Lockable Door
<b>Corner Guards</b>	
PCG	PCG - Corner Guards [Set of Four]
<b>Trayslides</b>	
PTS3	PTS3 - Tray Slide
<b>Legs/Castors</b>	
PLK	PLK - Legs [non chargeable]

Available Accessories	
CP16	CARVERY PAD 1/1 GAST
PGK4	GN PACK 4
PGK5	GN PACK 5
PGK6	GN PACK 6
PGK7	GN PACK 7
PHTC	PANTHER - CERAMIC INSERT - 1/1 GN SIZE CERAMIC INSERT
PHTG	PANTHER - GLASS INSERT - 1/1 GN SIZE GLASS INSERT
PLK/S	PANTHER LEG KIT FOR CONVERSION IN THE FIELD

## Technical Picture

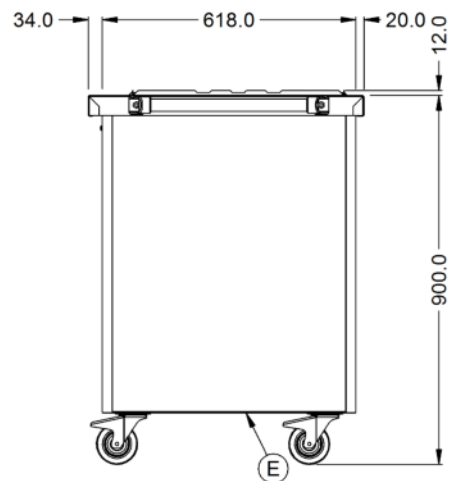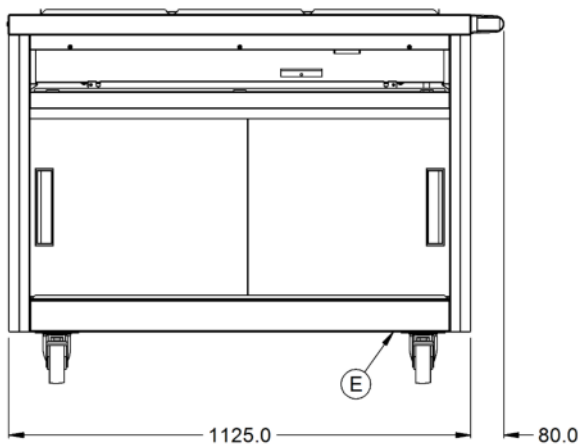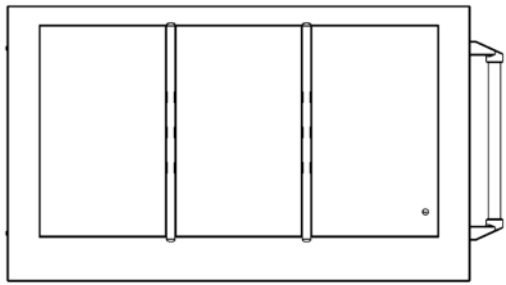

**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of

**Customer Care**

**Tel:** +44 1522 875500  
**Email:** [care@lincat.co.uk](mailto:care@lincat.co.uk)

**Export Customers**

**Tel:** +44 1522 503250  
**Email:** [export@lincat.co.uk](mailto:export@lincat.co.uk)

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm