

CHIEFTAIN BRATT PANS

E2965 and E2995 autolift



DESCRIPTION

Heavy duty, thermostatically controlled bratt pans. Safety features include high temperature limit device to cut off power to elements if pan overheats. The cast iron pan delivers even temperature across entire cooking surface.

The tilting mechanism is operated by foot bellows which can be folded away when not in use. The bellows in turn activate an electric actuator to raise and lower pan as required. Heat will be cut automatically when pan is raised or lowered.

G2962 model is 21 litre capacity, G2995 is 32 litre capacity.

FEATURES and BENEFITS

- Versatile cooking performance
 - *six different cooking activities can be achieved*
- Foot bellows controls automatic tilting
 - *leaves hands free to empty pan into receptacle*
- Heavy duty cast iron pan
 - *Durable and excellent for even heat distribution*
- Precise temperature control
 - *accurate and sensitive operation*
- Manual tilt models also available
 - *see specification for E2692 and G2994*

OPTIONAL ACCESSORIES

- 2/3 gastronorm compatible cradle (G2965)
- 1/1 gastronorm compatible cradle (G2995)

VENTILATION

Adequate ventilation, whether natural or mechanical, must be provided to supply sufficient fresh air for combustion and to allow easy removal of such products that may present risk to health. Recommendations for ventilation of appliances are given in BS5440:2 and HVCA specification DW/172. For multiple installations, requirements for individual appliances should be added together. Installation of any such system must be completed in accordance with local and/or national regulations that apply at time of commissioning

SITING

The unit must be installed on a firm, level floor in a well lit position. If levelling is necessary, this is effected by adjusting the feet.






CHIEFTAIN BRATT PANS

E2965 and E2995 autolift

MODEL DIMENSIONS (in mm)

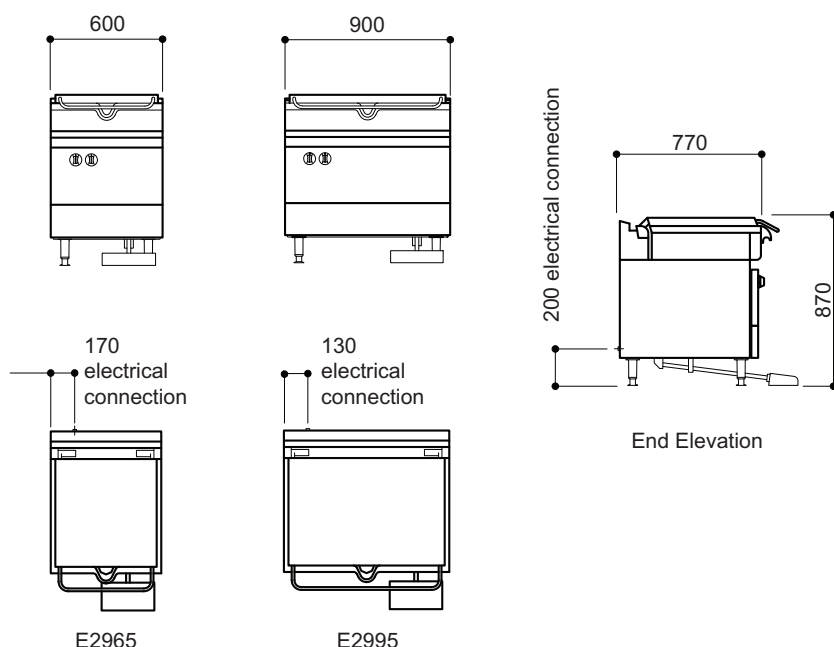

SPECIFICATION DETAILS

	E2965	E2995
Pan capacity (litres)	21	32
Electrical rating (kW)	5.88	8.82
Electrical supply voltage	230V N~ or 400V 2N~	230V N~ or 400V 3N~
Amps per phase (A)	L1 - 12.8, L2 - 12.8	L1 - 12.8, L2 - 12.8, L3 - 12.8
Weight (kg)	125	168
Packed weight (kg)	137	184