

*True*®

THE DEFINITION OF PRODUCT INTEGRITY

TGU • TGW

TRUE GASTRONORM UNITS

UNDERCOUNTERS • WORKTOPS

FEATURING THE REVERSING CONDENSER FAN MOTOR



# TRUE GASTRONORM UNDERCOUNTERS



Stainless steel interior & exterior standard on all True Gastronorm Units.



**TGU-2**

True's Gastronorm Units are designed with enduring quality that protects your long term investment.



**TGU-3F**

Designed using the highest quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

## GASTRONORM UNDERCOUNTERS

MODEL	DOORS/ DRAWERS	CAPACITY (LITERS)	SHELVES	CABINET DIMENSIONS (L X D† X H MM)	HP	VOLTAGE	AMPS	CORD LENGTH (M)	CRATED WEIGHT (KG)
<b>REFRIGERATORS</b>									
TGU-2	2/0	297	6	1420 x 712 x 864	1/3	230-240/50/1	2.3	2.74	157
TGU-3	3/0	456	9	1880 x 712 x 864	1/3	230-240/50/1	3.0	2.74	200
TGU-4	4/0	671	12	2337 x 705 x 864	1/2	230-240/50/1	4.0	2.74	264
<b>DRAWERED REFRIGERATORS</b>									
TGU-3D-2	2/2	456	6	1880 x 705 x 864	1/3	230-240/50/1	3.0	2.74	202
<b>FREEZERS</b>									
TGU-2F	2/0	297	6	1420 x 705 x 864	1/2	230-240/50/1	3.5	2.74	182
TGU-3F	3/0	456	9	1880 x 712 x 864	1/2	230-240/50/1	4.1	2.74	207

†Depth dimension does not include 26mm required for rear bumpers.

Dimensions rounded up to the next whole number. Specifications subject to change without notice.

**True**<sup>®</sup>

# TRUE GASTRONORM WORKTOPS



True's stainless steel radius counter-top design provides a durable, long-lasting, beautiful finish.

- ▶ Refrigerators - Oversized, environmentally friendly (134A) forced-air refrigeration system holds .5°C to 3.3°C (33°F to 38°F).
- ▶ Freezers - Oversized, environmentally friendly (404A) forced-air refrigeration system holds -23.3°C (-10°F).
- ▶ Stainless steel exterior.
- ▶ Stainless steel radius counter-top.
- ▶ Stainless steel interior.
- ▶ LED temperature display.
- ▶ Front ventilation.
- ▶ Foamed-in-place, high density polyurethane insulation (CFC free).
- ▶ 3 sets of 1/1 gastronorm rails with stainless steel shelves per section.



**TGW-2**



**TGW-3D-2**

## GASTRONORM WORKTOPS

MODEL	DOORS/ DRAWERS	CAPACITY (LITERS)	SHELVES	CABINET DIMENSIONS (L X D† X H MM)	HP	VOLTAGE	AMPS	CORD LENGTH (M)	CRATED WEIGHT (KG)
<b>REFRIGERATORS</b>									
TGW-2	2/0	297	6	1420 x 712 x 966	1/3	230-240/50/1	2.3	2.74	166
TGW-3	3/0	456	9	1880 x 705 x 966	1/3	230-240/50/1	3.0	2.74	216
TGW-4	4/0	671	12	2337 x 705 x 966	1/2	230-240/50/1	4.0	2.74	264
<b>DRAWERED REFRIGERATORS</b>									
TGW-3D-2	2/2	456	6	1880 x 705 x 966	1/3	230-240/50/1	3.0	2.74	202
<b>FREEZERS</b>									
TGW-2F	2/0	297	6	1420 x 712 x 966	1/2	230-240/50/1	3.5	2.74	166
TGW-3F	3/0	456	9	1880 x 712 x 966	1/2	230-240/50/1	4.1	2.74	216

†Depth dimension does not include 26mm required for rear bumpers.


Dimensions rounded up to the next whole number.  
Specifications subject to change without notice.

[www.truemfg.com](http://www.truemfg.com)

# True®

## ADVANCED TECHNOLOGY

### REVERSING CONDENSER FAN MOTOR

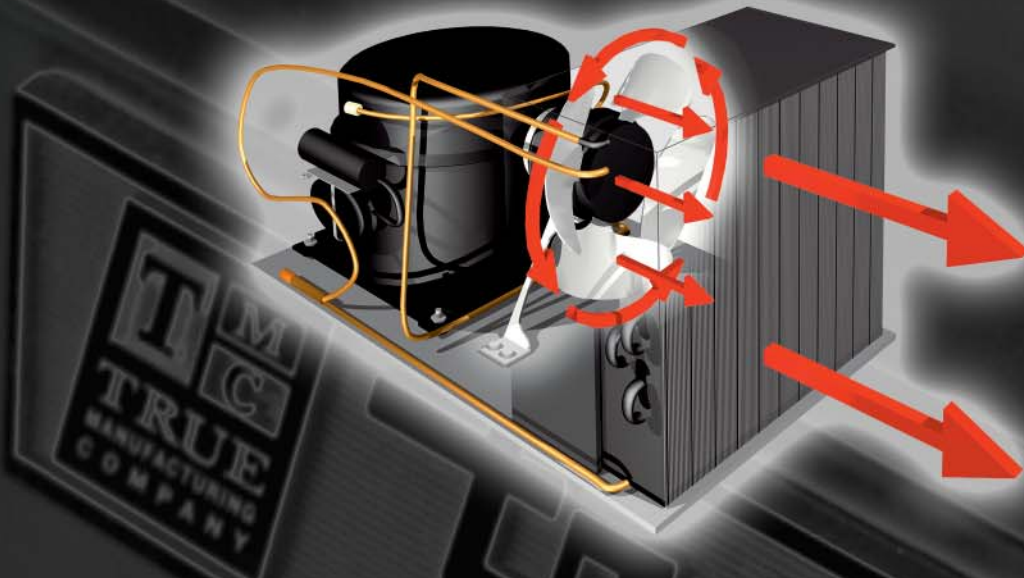

#### REVERSING CONDENSER FAN MOTOR TEST AFTER FOUR YEARS

WITHOUT RCFM



WITH RCFM



## REVERSING AIR FLOW KEEPS YOUR CONDENSER CLEAN\*

\*Manufacturer recommended condenser cleaning every 2-3 months.  
Please consult your technical/installation manual for proper cleaning instructions.

# True®

TRUE FOOD SERVICE REFRIGERATION U.K.  
Field's End Road, Goldthorpe, Nr. Rotherham  
South Yorkshire S63 9EU, England

TRUE FOOD INTERNATIONAL, INC.  
2001 East Terra Lane PO Box 970  
O'Fallon, MO 63366 U.S.A.

U.K. Office Tel: +44 (0) 01709 888 080  
U.K. Office Fax: +44 (0) 01709 880 838  
U.K. Free Phone: 0 800 783 2049  
U.K. Free Phone to U.S.: 0 800 894 928

U.S. Tel: (001) 636 240 2400  
U.S. Fax: (001) 636 272 7546  
E-mail: [trueintl@truemfg.com](mailto:trueintl@truemfg.com)  
Website: [www.truemfg.com](http://www.truemfg.com)