

Product Code: EP1/4L EcoPro G2 1/4 Freezer Counter



Features & Benefits

- High Quality 304 Stainless Steel Exterior Build Quality
- ECA Scheme Approved as ECA products are guaranteed to be energy efficient, money can be claimed back on your investment
- Smartphone style' touch sensitive hidden until lit control pannel
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- Energy-saving Hydrocarbon refrigerant option at no extra cost
- High performance cyclopentane foam
- Airlines' ventilation system reduces compressor running time by 15%
- Take the travel out of food preparation

External Finish		Internal Finish		Shelving	
304 s/s	Standard	aluminium	Standard	Additional S/S Trayslides	Option
304 S/S back for island sitting	Option	304 s/s	Option	GN1/1 Shelf	Option
Worktop	Standard	Doors		Refrigeration	
Base Fittings		Solid	Standard	R290 - Energy Efficient	Standard
100mm legs in lieu of castors	Option	Product Extras		R404a - Industry Standard	Option
Castors 80mm	Standard			Integral Refrigeration System	Standard
Legs 150mm	Option	Helicoil Mains Lead	Option	Less Condensing Unit	Option
Electrical, Service & Ecodesign		Less Worktop	Option	Remote Refrigeration System	Option
Data				RH Mounted Ref Unit	Option
230/50/1	Standard			Specification	
Fuse Required	13			Dimensions (Width)	2320
Global Warming Potential	3			Dimensions (Height)	865
Energy Efficiency Index	64.51			Dimensions (Depth)	700
Refrigerant Charge	N/A			Weight (Unpacked, kg)	162.5
				Weight (Packed, kg)	191.84
				Gross Volume	585


Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm

TBC

Noise Dba @ 1M

- Depth with door open is 1113mm
- Decibel rating measured 1m high from the floor and 1m out from the counter
- 60Htz model supplied as 220v machine with separate transformer for conversion to 115v supply.
- Adequate airflow must be kept around the counter: 150mm

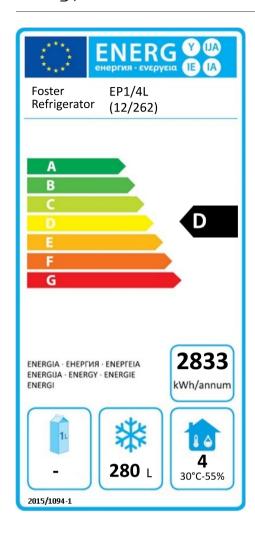

Application

This appliance is intended for use in ambient temperatures up to 40°C **Safety**

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit our policies













Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU Phone 08432 168800 | Email sales@foster-uk.com | Visit www.fosterrefrigerator.com