

Product Code: EP700L 10–105 EcoPro G2 600 Litre Upright Freezer Cabinet



Features & Benefits

- All new thicker and more robust cabinet design with advanced thermal efficiency and market leading capacity making your money go further
- New 'smartphone style' touch sensitive hidden-until-lit control panel with unique high visibility temperature display combines sophistication with functionality
- All-new ergonomic door and handle design for ease of opening and cleaning
- Designed using high technology: 'Fluid Food-Fresh Dynamics' modelling, the new and improved advanced Foster Circulair II air distribution system maximises efficient operation even when shelves are fully loaded
- Brand-new refrigeration system designed to be the most technologically advanced and energy efficient yet
- Features Foster's new award-winning +stayclear condenser, revolutionising the effective operation of your refrigeration, ensuring your equipment works more efficiently for longer

| External Finish | | |
|---|--------------------|--|
| s/steel ext, 304 s/s door | Standard | |
| 304 S/S back for island sitting | Option | |
| Base Fittings | | |
| Castors 80mm | Standard | |
| Electrical, Service & Ecodesign Data | | |
| | | |
| 230/50/1 | Standard | |
| 230/50/1 220/60/1 Electrical Supply | Standard Option | |
| | - | |

Internal Finish

Standard

Option

aluminium

| Doors | |
|-----------------------|----------|
| Solid | Standard |
| Left Hand Hinged Door | Option |

Product Extras

| oil Mains Lead |
|----------------|
|----------------|

Shelving

| Additional S/S Trayslides | Option |
|---------------------------|----------|
| Additional GN2/1 Shelf | Option |
| 3 Shelves (GN 2/1) | Standard |

Refrigeration

| R404a - Industry Standard | Standard |
|---------------------------|----------|
| Less Condensing Unit | Option |

Specification

| Dimensions (Width) | 700 |
|-----------------------|-------|
| Dimensions (Height) | 2080 |
| Dimensions (Depth) | 820 |
| Weight (Unpacked, kg) | 121 |
| Weight (Packed, kg) | 132.6 |
| Gross Volume | 600 |
| Noise Dba @ 1M | 64.1 |

Footnotes

Energy Efficiency Index

Refrigerant Charge


• 150mm castors are not available if product is supplied less condensing unit

63.42

0.275

- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

Energy Performance Data and information

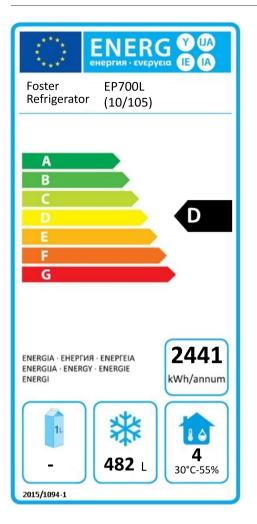

Application

This appliance is intended for use in ambient temperatures up to 40°C **Safety**

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit our policies



Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU Phone 08432 168800 | Email sales@foster-uk.com | Visit www.fosterrefrigerator.com