GLASSWASHER X-40

400x400mm racks. Max. loading height: 240mm





SALES DESCRIPTION

3 wash cycles. Cold rinse facility. Option of built-in water softener.

- Best performance.
- ✓ Optimal washing results.
- Sturdy and reliable.
- √ Stainless steel, sturdy and resistant washing arms.Don't get damaged because of chemical corrosion.
- √ 2.5 kW boiler and 1.5 kW wash tank: optimal recovery times.
- √ Full optional list.

FEATURES AND BENEFITS

- √ For washing glasses, cups, cutlery and small plates.
- √ 3 wash cycles with final cold rinse.
- Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.
- ✓ Double skinned door with high efficiency seal, ensuring thermal and acoustic insulation. Magnetic door micro-switch.
- Removable stainless steel rack holders ensure even distribution of wash water without dead zones. Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.
- Rinsing dispensers without screws, easy assembly and simple and clean look.
- ✓ A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.
- Completely rounded, stainless steel wire rack support and
- ✓ Automatic detergent and rinse aid dosing equipment.
- ✓ Electronic control panel with anti-moisture seal.
- Adjustable washing tank and boiler temperature and security in the boiler.
- Rinse boiler temperature adjustment and a thermal cycle delay option, guaranteeing a minimum final rinse temperature of 85°C for each and every rinse cycle.
- Sammic ware washers are designed for easy and fast on-site maintenance.

NCLUDES

- √ Rinse aid pump.
- √ 1 mixed basket.
- ✓ Detergent dosing equipment.
- √ 1 small cutlery basket.
- √ 1 open basket.







sammic



Food Service Equipment Manufacture Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty



GLASSWASHER X-40

400x400mm racks. Max. loading height: 240mm

SPECIFICATIONS

Basket dimensions: 400 mm x 400 mm Maximum glass height: 240 mm Cycle duration: 90 " / 120 " / 150 " Production baskets/hour: 40/30/24 Water consumption/cycle: 2.2 I

Loading

√ Pump: 220 W / 0.3 Hp

√ Tank: 1500 W ✓ Boiler: 2500 W

√ Total loading: 2720 W

External dimensions (WxDxH)

✓ Width:470 mm

✓ Depth: 535 mm


✓ Height: 670 mm


Net weight: 41 Kg

Noise level (1m.): 71 dB(A)

Crated dimensions

525 x 615 x 820 mm

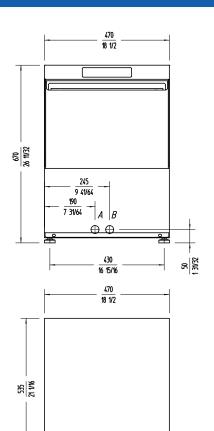



AVAILABLE MODELS

1301982	Glasswasher X-40 230/50/1 DD
1301986	Glasswasher X-40B 230/50/1 DD (with drain pump)
1301990	Glasswasher X-40D 230/50/1 DD (built-in water softener)
1301995	Glasswasher X-40BD 230/50/1 DD (built-in water softener and drain pump)

^{*} Ask for special versions availability

Accessories

- ☐ Stands for glass- and dishwashers
- Dosing equipments
- Manual water softeners
- Automatic water softeners
- ☐ 400X400 mm. baskets
- ☐ Inserts, supplements & similar
- □ High Feet Kit



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty