



GLASSWASHER P-41S

To wash 30 baskets/hour. 400x400mm racks. Max. loading height: 280mm.



WARE WASHING
COMMERCIAL GLASSWASHERS



FEATURES AND BENEFITS

- ✓ Manufactured from catering grade stainless steel and incorporating top quality components.
- ✓ Double skinned door with high efficiency seal, ensuring thermal and acoustic insulation. Magnetic door micro-switch.
- ✓ Easy use electro/mechanical control panel.
- ✓ Pre-set 2 min wash cycle.
- ✓ Removable stainless steel rack holders ensure even distribution of wash water without dead zones. Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.
- ✓ A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.
- ✓ The P-35 incorporates a wash tank and independent rinse boiler.
- ✓ Automatic detergent and rinse aid dosing equipment.
- ✓ Designed for quick and easy maintenance.

INCLUDES

- ✓ Rinse aid pump.
- ✓ Detergent dosing equipment.
- ✓ 1 mixed basket.
- ✓ 1 small cutlery basket.
- ✓ 1 open basket.

SALES DESCRIPTION

Top + bottom wash arms. Capacity by basket: 20 glasses of Ø8cm. each. Hourly output: 30 baskets or 600 glasses.

- ✓ User-friendly.
- ✓ Optimal washing results.
- ✓ Sturdy and reliable.
- ✓ Stainless steel, sturdy and resistant washing arms. Don't get damaged because of chemical corrosion.



www.sammic.co.uk
Food Service Equipment Manufacturer
 Unit 2, Trevanah Road
 Troon Industrial Park
 LE4 9LS - Leicester
 uksales@sammic.com
 Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 06/03/2018



GLASSWASHER P-41S

To wash 30 baskets/hour. 400x400mm racks. Max. loading height: 280mm.



SPECIFICATIONS

- Basket dimensions: 400 mm x 400 mm
- Maximum glass height: 280 mm
- Cycles:
- Cycle duration: 120 " / " / "
- Production baskets/hour: 30 / -- / --
- Upper wash: Yes
- Electronic control panel: No
- Built-in water softener: No
- Wash temperature: 0 °C - 65 °C
- Rinse temperature: 0 °C - 90 °C
- Wash temperature display: No
- Rinse temperature display: No
- Electrical supply: V / [v:011_frecuencia] / 1 ~

Loading

- ✓ Pump: 0.33 Hp / 240 W
- ✓ Tank: 1500 W
- ✓ Boiler: 2000 W
- ✓ Total loading: 2240 W

Equipment



- ✓ Brightener dispenser: Yes
- ✓ Detergent dispenser: Yes
- ✓ Drainage pump: Optional
- ✓ Basket for glasses: 1
- ✓ Mixed basket: 1
- ✓ Cutlery basket: 1
- ✓ Support: Optional

External dimensions (WxDxH)

- ✓ Width: 470 mm
 - ✓ Depth: 535 mm
 - ✓ Height: 710 mm
- Net weight: Optional

Crated dimensions

600 x 520 x 820 mm

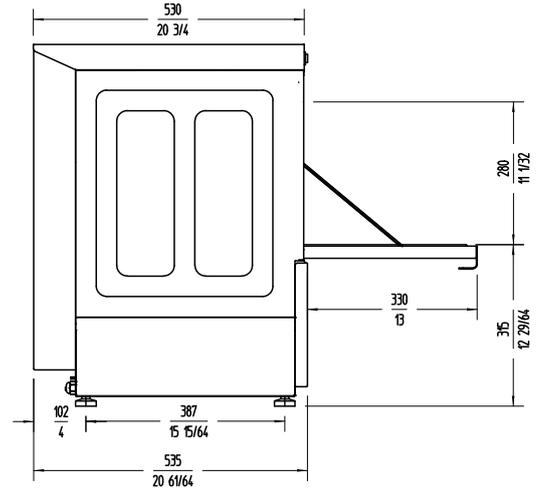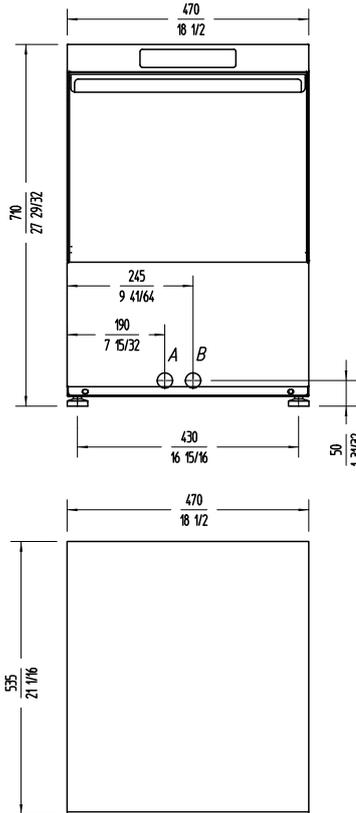

AVAILABLE MODELS

1302008 Glasswasher P-41S 230/50/1 DD

1302011 Glasswasher P-41SB 230/50/1 DD (with drain pump)

* Ask for special versions availability

WARE WASHING
COMMERCIAL GLASSWASHERS



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 06/03/2018