

# Cobra®



 **BLUE SEAL®**



## Why Cobra

Cobra represents outstanding value, performance and most importantly reliability. Cobra is ideally suited to small and medium sized eateries whilst offering a flexible range of products. The Cobra range of Cooktops, Barbecues and Griddle Toasters have a unique open cabinet base offering increased storage space as standard.

## The Open Burner

Cobra's 5.5kW (18,800Btu/hr) open burners are a simple two piece construction for easy cleaning. Robust controls give a hi to lo turndown to simmer position with safe push'n'turn on or off settings.

## Moveable

All modular units feature sturdy legs at the front with rollers at the rear for ease of placement and servicing.

Gas Cooktop/Gas Griddle 600mm	4
Gas Cooktop/Gas Griddle 900mm	5
Gas Range Static Oven 600mm	6
Gas Range Static Oven 900mm	7
Gas Barbecue 600mm	8
Gas Salamander 900mm	9
Gas Fryer 400mm	10
Gas Griddle Toaster 600mm	11

## Meet the Cobra series of modular kitchen equipment.

This new range provides a simple, effective system of cooking, one that can be used in small to mid-size kitchens from entry-level restaurants to cafes and takeaway spots. Each piece is designed and built to meet three main criteria - that they be affordable, functional and reliable.

The main advantage of the Cobra range is the economical price tag. Often the key to small business is simplicity, and Cobra offers the essential range of equipment solutions to meet your needs. What's more, the range is backed with the service and after sales support that makes all the difference amid the hustle and bustle of the modern day kitchen.

Every Cobra product is modular, with no assembly required. The ease of use doesn't stop there, with the stainless steel finish adding to the overall durability and functionality.



# Gas Cooktop / Gas Griddle 600mm



C6D

The Cobra Gas Cooktop has been designed to meet every standard the busy kitchen demands. Available in both 600mm and 900mm, the cooktop is mounted on a cabinet base offering convenient storage. The simple lift-out 5.5kW (18,800Btu/hr) rated open burner provides performance and easy cleaning. And the cast iron burners and trivets are finished to the highest quality in vitreous enamel for good looks and durability.

Fitting a griddle to your cooktop allows an even greater degree of flexibility and adds to the overall capability of the Cobra cooktop.

## The Standards

Stainless steel finish

5.5kW (18,800Btu/hr) open burners

Cast iron burners and vitreous enamel pot stands

600MM WIDE MODULE

2 or 4 open burner configuration

Griddle options – 300mm and 600mm machine finished 12mm thickness, with piezo ignition

900MM WIDE MODULE

4 or 6 open burner configuration

Griddle options – 300mm, 600mm, and 900mm machine finished 12mm thickness, with piezo ignition

Open cabinet base for extra storage


Adjustable front feet and rear rollers

Fully modular

Flame failure protection on open burners



C6C

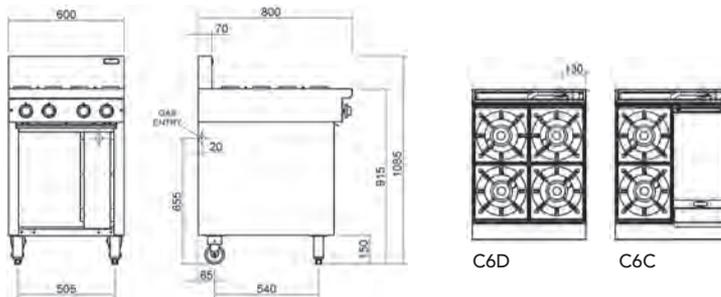

C6D

C6C

## TECHNICAL DATA GAS COOKTOP / GAS GRIDDLE 600MM

Burners	Gas power (gross)	Gas connection	Dimensions	Packing data	Gas types
Open Burners; Natural Gas 5.5kW, 18,800Btu/hr each LP gas 5.0kW, 17,075Btu/hr each	Natural Gas C6D 22kW, 75,130Btu/hr C6C 16.5kW, 56,350Btu/hr LP gas C6D 20kW, 68,300Btu/hr C6C 15.5kW, 52,935Btu/hr	R <sup>3</sup> / <sub>4</sub> (BSP) male 130mm from RH side, 20mm from rear, and 655mm from floor  <i>All units supplied with Natural and LP gas regulator</i>	Width 600mm Depth 800mm Height 915mm Incl. splashback 1085mm	0.70m <sup>3</sup> Width 640mm Depth 865mm Height 1255mm 72kg nett weight 122kg packed weight	Available in Natural gas and LP gas, please specify when ordering  <i>Other gas types on request</i>



# Gas Cooktop / Gas Griddle 900mm



C9D



C9C

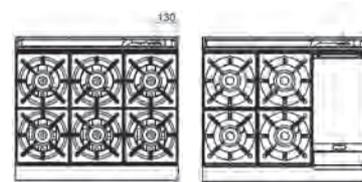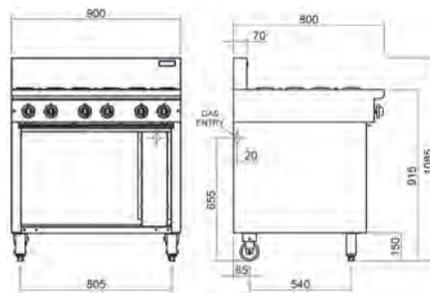

C9D

C9C

## TECHNICAL DATA GAS COOKTOP / GAS GRIDDLE 900MM

Burners	Gas power (gross)	Gas connection	Dimensions	Packing data	Gas types
Open Burners; Natural Gas 5.5kW, 18,800Btu/hr each LP gas 5.0kW, 17,075Btu/hr each	Natural Gas C9D 33kW, 112,700Btu/hr C9C 27.5kW, 93,910Btu/hr LP gas C9D 30kW, 102,450Btu/hr C9C 25.5kW, 87,080Btu/hr	R $\frac{3}{4}$ (BSP) male 130mm from RH side, 20mm from rear, and 655mm from floor <i>All units supplied with Natural and LP gas regulator</i>	Width 900mm Depth 800mm Height 915mm Incl. splashback 1085mm	1.02m <sup>3</sup> Width 940mm Depth 865mm Height 1255mm 100kg nett weight 165kg packed weight	Available in Natural gas and LP gas, please specify when ordering <i>Other gas types on request</i>

# Gas Range Static Oven 600mm



CR6D

The centerpiece of any kitchen, the oven range needs to be the workhorse. The Cobra Oven Range has a generous gastronorm capacity, with standard 2/1 GN or two 1/1 GN pans (900mm) and one 1/1 GN pan (600mm) on each rack. The high crown height means the oven can consistently deliver the volume required in small and medium-sized eateries.


The optional 300mm griddle section allows for a configuration to suit your specific needs and the cast iron burners are removable for quick cleaning. Pot stands, oven liners and the steel oven base tray are all fully vitreous enameled, allowing for a ready-to-go, easy-to-use oven.

## The Standards


- Stainless steel finish
- 5.5kW (18,800Btu/hr) burners
- Cast iron burners and vitreous enamel pot stands
- Manual pilot ignition
- High crown static oven
- Welded vitreous enameled oven liner
- Griddle option – 300mm machine finished 12mm thickness, with piezo ignition
- Adjustable front feet and rear rollers
- Fully modular
- Flame failure protection on open burners
- 600MM WIDE MODULE
- 2 or 4 open burner configuration
- Side hinged door
- 900MM WIDE MODULE
- 4 or 6 open burner configuration
- French door system



CR9C

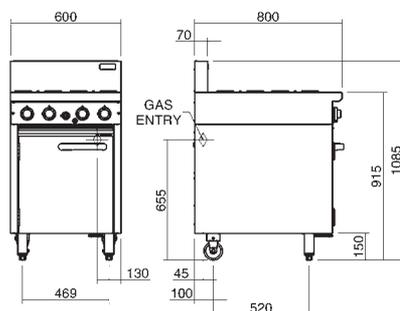

CR6D



CR6C

## TECHNICAL DATA GAS RANGE STATIC OVEN 600MM

Burners	Gas power (gross)	Oven Dimensions	Gas connection	Dimensions	Gas types
Open Burners; Natural Gas	Natural Gas CR6D	Width 460mm Depth 615mm Height 365mm	R <sup>3</sup> / <sub>4</sub> (BSP) male 130mm from RH side, 20mm from rear, and 655mm from floor	Width 600mm Depth 800mm Height 915mm Incl. splashback 1085mm	Available in Natural gas and LP gas, please specify when ordering
5.5kW, 18,800Btu/hr each LP gas	29kW, 99,000Btu/hr CR6C	Rack size 450mm x 590mm Rack positions 4	All units supplied with Natural and LP gas regulator	Packing data 0.7m <sup>3</sup> Width 640mm Depth 865mm Height 1255mm 115kg nett weight 167kg packed weight	Other gas types on request
5.0kW, 17,000Btu/hr each Griddle Burners; 5.5kW, 18,800Btu/hr per 300mm section	23.5kW, 80,200Btu/hr LP gas CR6D 26.5kW, 90,400Btu/hr CR6C				
Oven; 7.0kW, 23,800Btu/hr	21.5kW, 73,400Btu/hr				

# Gas Range Static Oven 900mm





CR9D



The 900mm wide Cobra Oven Range features a full width oven with generous crown height.



CR9C

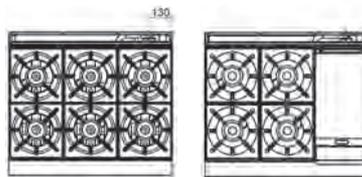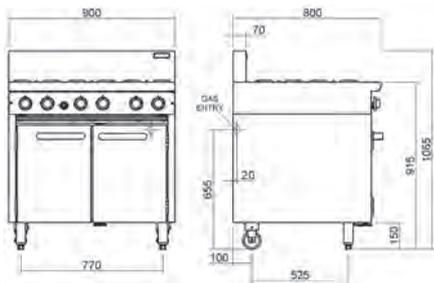

CR9D

CR9C

## TECHNICAL DATA GAS RANGE STATIC OVEN 900MM

Burners	Gas power (gross)	Oven Dimensions	Gas connection	Dimensions	Gas types
Open Burners; Natural Gas	Natural Gas	Width 760mm	R <sup>3</sup> / <sub>4</sub> (BSP) male	Width 900mm	Available in Natural gas and LP gas, please specify when ordering
5.5kW, 18,800Btu/hr each	CR9D	Depth 615mm	130mm from RH side,	Depth 800mm	
LP gas	41kW, 140,000Btu/hr	Height 365mm	20mm from rear, and	Height 915mm	<i>Other gas types on request</i>
5.0kW, 17,075Btu/hr each	CR9C	<b>Rack size</b>	655mm from floor	Incl. splashback 1085mm	
Griddle Burners;	35.5kW, 121,240Btu/hr	750mm x 590mm	<i>All units supplied with Natural and LP gas regulator</i>	<b>Packing data</b>	
5.5kW, 18,800Btu/hr per	LP gas	Rack positions 4		1.02m <sup>3</sup>	
300mm section	CR9D			Width 940mm	
Oven;	38kW, 129,800Btu/hr			Depth 865mm	
8.0kW, 27,320Btu/hr	CR9C			Height 1255mm	
	33.5kW, 114,400Btu/hr			145kg nett weight	
				210kg packed weight	

# Gas Barbecue 600mm



CB6

Unlock the taste of genuine barbecue flavour. The Cobra Barbecue can deliver that experience without breaking the budget... or the floor plan. The cast iron grates, used in either a flat or tilted position, have the ideal edge to produce a fine branded finish.


V-shaped cast iron burners, radiants and baffle plates are all easily removed for cleaning.

## The Standards

- 600mm wide
- Stainless steel finish
- Stainless steel grease tray
- Reversible top grates
- Inclined position to reduce flare and enhance grease run
- 2 x 9kW aluminized burners
- Flame failure protection with continuous pilot burner and piezo ignition
- Lift out grates, radiants and baffles for cleaning
- Open cabinet base for extra storage
- Adjustable front feet and rear rollers



Grids can be used flat or tilted.

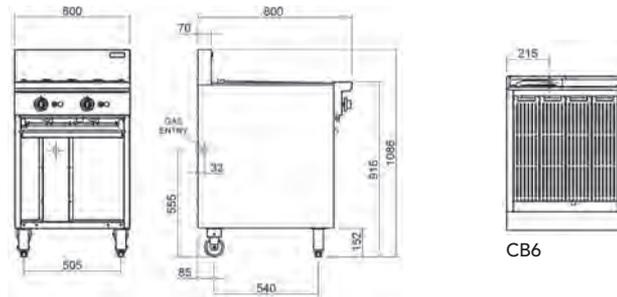

CB6

## TECHNICAL DATA GAS BARBECUE 600MM

Burners	Cooking surface area	Gas connection	Dimensions	Packing data	Gas types
2 x 9.8kW, 33,470Btu/hr U-burners	540mm x 500mm, 2700cm <sup>2</sup>	R1/2 (BSP) male 215mm from LH side, 32mm from rear, and 555mm from floor	Width 600mm Depth 800mm Height 915mm Incl. splashback 1085mm	0.70m <sup>3</sup> Width 640mm Depth 865mm Height 1255mm 90kg nett weight 140kg packed weight	Available in Natural gas and LP gas, please specify when ordering <i>Other gas types on request</i>
<b>Gas power (gross)</b> 19.6kW, 66,940Btu/hr		<i>All units supplied with Natural and LP gas regulator</i>			

# Gas Salamander 900mm



CS9

When melting, grilling or toasting the Cobra Salamander is the perfect choice. Able to be placed on a bench or wall mounted they prove versatile addition in the kitchen.

Compared to standard blue flame systems, the powerful infrared burners offer far greater efficiency and high performance.


## The Standards

- 900mm wide
- Stainless steel finish
- Dual high performance infrared burners
- Removable easy-clean bottom tray
- Independently controlled sides
- Flame failure protection on each burner
- Wall mounting bracket supplied

Optional: Branding plate



Designed to be either bench or wall mounted.

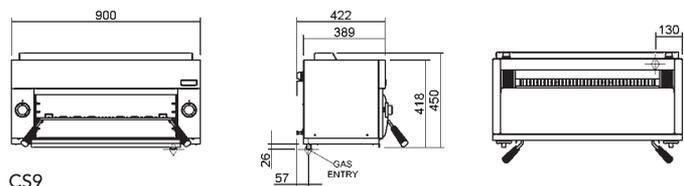

CS9

## TECHNICAL DATA GAS SALAMANDER 900MM

Burners	Gas connection	Dimensions	Cooking area	Packing data	Gas types	Options at extra cost
2 x 4.4kW, 15,000Btu/hr	R <sup>1</sup> / <sub>2</sub> (BSP) female 130mm from right side, 25mm from rear	Height 450mm Width 900mm Depth 389mm (422mm with wall mounting bracket)	Rack size 610mm x 310mm, 1890cm <sup>2</sup>	0.32m <sup>3</sup> Width 940mm Depth 520mm Height 640mm 42kg nett weight 69kg packed weight	Available in Natural gas and LP gas, please specify when ordering  All units are supplied with gas conversion kits	Branding Plate 610mm x 310mm, 1890cm <sup>2</sup>

# Gas Fryer 400mm



CF4

A small kitchen often has big use for a fryer. That's why the Cobra Fryer is high in performance. This open pan fryer provides an effective 'cool zone' that delivers longer oil life, high efficiency and it's easy to clean.


The Cobra fryer features a stainless steel pan and external finish. It's the fryer that can take the knocks, and just keep delivering.

## The Standards

- 400mm wide
- Stainless steel finish
- Patented infrared burner system
- Stainless steel open pan
- 25mm drain valve
- 21 litre oil capacity
- Mechanical thermostat
- Manual pilot ignition
- Basket and lids included
- Adjustable front feet and rear rollers



Cobra's open pot design with cool zone ensures longer life of cooking oil.

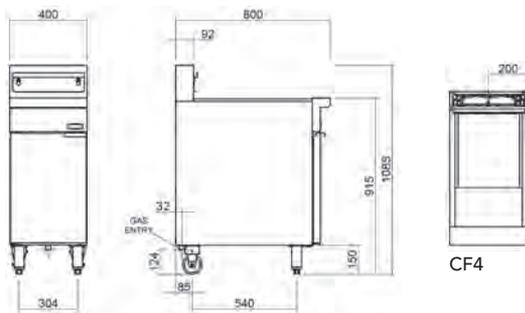

CF4

## TECHNICAL DATA SINGLE PAN GAS FRYER 400MM

Burners	Pan size	Gas connection	Dimensions	Packing data	Gas types
2 x 12.5kW, 42,690Btu/hr infra-red burners	Oil capacity 21L (37lbs shortening)	R <sup>3</sup> / <sub>4</sub> (BSP) male	Width 400mm	0.53m <sup>3</sup>	Available in Natural gas and LP gas, please specify when ordering
<b>Gas power (gross)</b>	Width 315mm	200mm from RH side, 32mm from rear, and 124mm from floor	Depth 800mm	Width 865mm	<i>Other gas types on request</i>
25kW, 85,380Btu/hr	Length 380mm	<i>All units supplied with Natural and LP gas regulator</i>	Height 915mm	Depth 490mm	
	Oil frying depth 95mm		Incl. splashback 1085mm	Height 1255mm	
				66kg nett weight	
				106kg packed weight	

# Gas Griddle Toaster 600mm



CT6

The Cobra Griddle Toaster offers full griddle plate performance plus the benefit of a toasting compartment.


Specially designed burners and stainless steel radiants perform two different functions, heating the 12mm thick grill plate and providing heat to the toasting rack with five toasting rack positions to choose from.

## The Standards

- 600mm wide
- Stainless steel finish
- 2 x 5.5kW (18,800Btu/hr) burners
- Variable heat dual gas controls
- Flame failure protection with continuous pilot burner and piezo ignition
- 12mm thick griddle plate
- 5-position toasting rack
- Full width grease trough and removable collection tray
- Open cabinet base for extra storage
- Adjustable front feet and rear rollers



Constructed from machine finished mild steel plate.

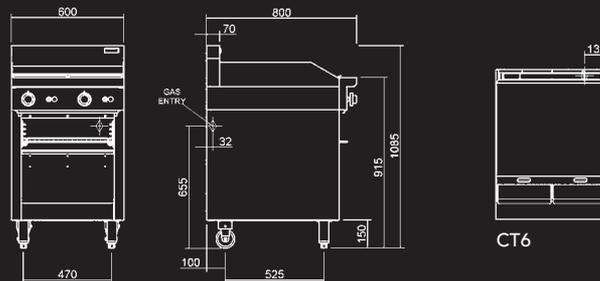

CT6

## TECHNICAL DATA GAS GRIDDLE TOASTER 600MM

Burners	Cooking surface	Gas connection	Dimensions	Packing data	Gas types
2 x 6kW, 20,400Btu/hr tubular burners with grill radiants	590mm x 520mm, 3068cm <sup>2</sup>	R1/2 (BSP) male, 130mm from RH side, 32mm from rear, and 655mm from floor	Width 600mm Depth 800mm Height 915mm Incl. splashback 1085mm	0.70m <sup>3</sup> Width 640mm Depth 865mm Height 1255mm 93kg nett weight 143kg packed weight	Available in Natural gas and LP gas, please specify when ordering <i>Other gas types on request</i>
<b>Gas power (gross)</b> 12kW, 40,800Btu/hr	<b>Toaster Dimensions</b> Rack size 430mm x 470mm Rack positions 4	<i>All units supplied with Natural and LP gas regulator</i>			



[www.blue-seal.co.uk](http://www.blue-seal.co.uk)

United Kingdom  
Blue Seal Limited

Unit 67  
Gravelly Business Park  
Gravelly  
Birmingham B24 8TQ  
England  
Ph 0121-327 5575  
Fax 0121-327 9711  
[sales@blue-seal.co.uk](mailto:sales@blue-seal.co.uk)  
[www.blue-seal.co.uk](http://www.blue-seal.co.uk)

Australia  
Moffat Pty Limited

740 Springvale Road  
Mulgrave  
Victoria 3170  
Australia  
Ph 03-9518 3888  
Fax 03-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)  
[www.moffat.com.au](http://www.moffat.com.au)

New Zealand  
Moffat Limited

16 Osborne Street  
PO Box 10-001  
Christchurch 8011  
Ph 03-389 1007  
Fax 03-389 1276  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)  
[www.moffat.co.nz](http://www.moffat.co.nz)



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by



ISO9001

All Cobra products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

Printed in United Kingdom  
© Copyright Moffat Ltd  
Moffat 07.10

