

## Seal Food Merchandiser (350 Refrigerated)

### Key Features

- Type: Refrigerated counter-top unit
- Side-mounted power pack
- R404a refrigerant
- Thermostatic temperature control with digital display
- Cabinet temperature 3°-5°C
- Fan cooled condenser
- Automatic defrost and condensate water evaporation
- Blown air circulation
- Diffused internal light
- Adjustable shelf positions
- Supplied with chrome-plated shelf
- Meets the performance requirements of BS EN ISO 23953-2:2005 Climate Class 3M1



D3R/100

### Construction

- Body: powder coated aluminium frame (silver)
- Internal components: stainless steel grade 430
- Glazing: toughened safety glass, double glazed
- Door: sliding rear doors
- Panel: black plastic coated steel
- Base plinth: black plastic coated steel
- Shelf: chrome plated

### Available Options


- 60Hz supply (price on request)

### Available Accessories

N/A

## Specifications

| Model                                                         | D3R/100   |
|---------------------------------------------------------------|-----------|
| External height (mm)                                          | 575       |
| External width (mm)                                           | 1000      |
| External depth (mm)                                           | 350       |
| Capacity net volume (litre)                                   | 96        |
| Number of Shelves (including base)                            | 2         |
| Shelf dimensions W x D (mm)                                   | 650 x 275 |
| Cabinet temperature (°C)                                      | 3°C – 5°C |
| Food holding temperature(°C)                                  | 3°C –7°C  |
| Maximum ambient temperature (°C)                              | 32°C      |
| Maximum ambient relative humidity (%)                         | 70%       |
| Total power rating kW                                         | 0.393     |
| Electrical supply 1N~+E<br>230V 50-60Hz<br>Current Rating (A) | 2         |
| Net weight unpacked (kg)                                      | 68        |
| Gross weight packed (kg)                                      | 86        |
| Shipping volume (m <sup>3</sup> )                             | 0.388     |

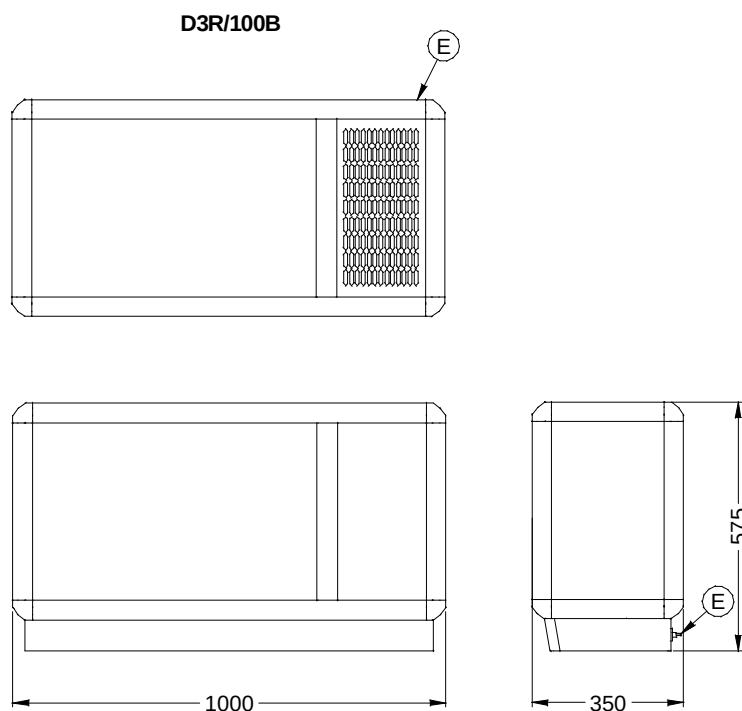

**Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom**

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
Website: [www.lincat.co.uk](http://www.lincat.co.uk) UK Sales e-mail: [sales@lincat.co.uk](mailto:sales@lincat.co.uk) International Sales e-mail: [export@lincat.co.uk](mailto:export@lincat.co.uk)



Document ref:  
SEAL350REF  
Issue date: Dec-09